
Grille Fittings

Quick Mount Fitting

(part # 99-QM6)

Use this rough-in fitting before the drywall is Installed.


- Nail fitting onto the stud.
- Available size: 6 in.



Stack Head Elbow (part # 99-WF4 / 99WF6)

Use this rough-in fitting before the drywall is installed. This fitting is ideal for running ducting through 2×4 (min.) studded walls.


- Nail to stud.
- Available sizes are 4 in and 6 in.



Terminator Fitting (part # 99-TM 4/5/6)

Use this rough-in fitting before the drywall is installed.


- Nail or screw fitting onto the stud or joist.
- Available sizes: 4 in, 5 in and 6 in.
- Use this rough-in fitting before the drywall is installed.
- Adapts to ridged and flex ducting
- Strong attachment for grilles, either vertically or horizontally

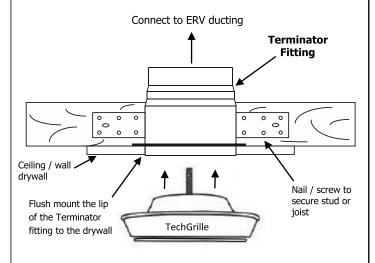

Suspended Ceiling Fitting (part # 99-CF6)

Use this fitting for ceiling tiles or finished/installed drywall.

- Cut a hole through the ceiling tile, insert the fitting and use the retaining ring to hold the fitting in place.
- For finished/installed drywall, use caulking around the lip if you do not have access to attach the retaining ring.
- Available size: 6 in.

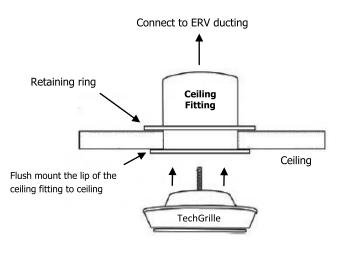

▲ Caution

Do not mount exhaust grille within 4 ft (1.2 m) (horizontally) of a stove to prevent grease from entering the unit.