SE 704N

Energy Recovery Ventilator



Fantech's smallest and most compact side duct connection ERV, the SE 704N unit brings a continuous supply of fresh air into a home while exhausting an equal amount of contaminated air. The enthalpic core at the center of the unit transfers heat and moisture from the incoming air to the outgoing air that was cooled and dried by the building's air conditioner.

Features

- Super Compact Size
- Includes Easy-Mount Wall Bracket
- Enthalpy Core
- No Balancing Required
- Unit Can Be Installed In Any Position
- No Defrost or Drain Pan Needed
- Easy Access Service Door
- Only 25 lbs (11 kg)
- Electrostatic Filters (washable)
- Easy Core Guide Channels For Removing Core
- Single Speed Ventilation

Accessories

FTD 7 – 7 Day Digital Programmable Timer
 COM 4P – 4" Weather Hoods (1 supply & 1 exhaust)

FEL 4 – 4" 90° Elbow
CG 4 – 4" Adjustable Grille

Specifications

• Average airflow – 56 cfm (26 L/s)

@ 0.4" P_s (100Pa)



Fans

Two (2) factory-balanced fans with backward curved blades. Motors come with permanently lubricated, sealed ball-bearings to guarantee long life and maintenance-free operation.

Energy Recovery Core

AHRI certified core made from water vapor transport durable polymer membrane that is highly permeable to humidity. The ERV core is freeze tolerant and water washable. Core dimensions are 8.5" x 8.5" (216 x 216 mm) with a 8" (205 mm) depth.

Serviceability

Core, filters, fans, drain pan and electrical panel can be accessed easily from the access panel. Core conveniently slides out with only 10" (250 mm) clearance.

Case

24 gauge galvanized steel. Baked powder coated paint.

Insulation

Cabinet is fully insulated with 1" (25 mm) high density expanded polystyrene.

Filters

Two (2) washable electrostatic panel type air filters 8.5" (216mm) x 8" (205mm) x 0.125" (3mm).

Controls


Unit is designed to operate continuously on a single speed. See FDT 7 under accessories or contact Tech Support for possible intermittent, line-voltage options.

Warranty

Limited 5 year on Enthalpy core, 7 year on motors, and 5 year on parts.




Dimensions & Airflow

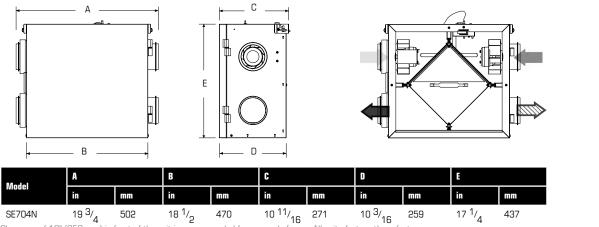

Clearance of 10" (250 mm) in front of the unit is recommended for removal of core. All units feature three foot plug-in power cord with 3-prong plug.

Ventilation Performance

in. wg. (Pa)	0.2 (50)	0.3 (75)	0.4 (100)	0.5 (125)	0.6 (150)
	cfm (L/s)				
Net supply airflow	78 (37)	67 (30)	56 (26)	42 (20)	-

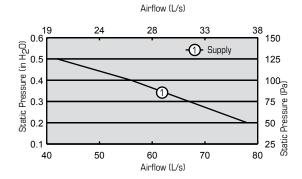

fresh air to inside fresh air from outside stale air from inside stale air to outside

	Supply temperature		Net airflow		Consumed Power	Net effectiveness		
						Sensible	Latent	Total
	°F	°C	cfm	L/s	W	%	%	%
	35	1.7	40	19	39	62	44	55
Heating	35	1.7	60	28	42	59	41	53
	35	1.7	80	38	43	56	37	50
	95	35	40	19	39	62	30	50
Cooling	95	35	60	28	42	59	37	46
	95	35	80	38	43	56	33	42

Requirements and standards

- Complies with the UL 1812 requirements regulating the construction and installation of Heat Recovery Ventilators
- Complies with the CSA C22.2 no. 113 Standard applicable to ventilators
- Complies with the CSA F326 requirements regulating the installation of Heat Recovery Ventilators
- Technical data was obtained from published results of test relating to CSA C439 Standards
- Energy Recovery Core is ISO 846 certified for mold and bacteria resistance and AHRI certificate #8931525)
- Technical data was obtained from published results of test relating to AHRI 1060 Standards

Contacts

Submitted by:		Date:
Quantity:	Model:	Project #:
Comments:		
Location:		
Architect:		
Engineer:		Contractor:

Distributed by:



United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net Canada 50 Kanalflakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

